


# CIRCULATION PUMP

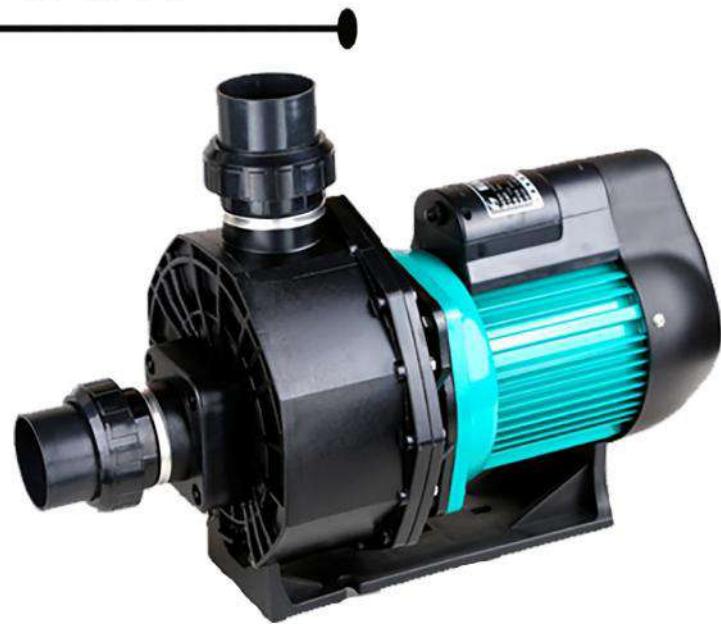

## FEATURES

- Pump, flange, strainer basket use GE/PP. Impeller use glass fiber filling polyphenylene oxide.
- With 2 inch outlet and insert and electric current overloaded protector.
- With mechanics principle design, low noise. Pump, flange, strainer basket use GE/PP
- IP X4 protection grade

## APPLICATION

- Apply for swimming pool, hydraulic massage bath, SPA, family swimming pool, and for restaurant sea food feeding

Model	Voltage	Power	Output	H-max	Weight	Tube Diamerer	Cable length
HLX-150	220V/50Hz	1100W	29M <sup>3</sup> /H	17M	17.2kg	63/60/mm	0.7m
HLX-200	220V/50Hz	1500W	32M <sup>3</sup> /H	16M	18.3kg	63/60/mm	0.7m
HLX-300	220V/50Hz	2200W	36M <sup>3</sup> /H	18M	20.4kg	63/60mm	0.7m
HLX-350	220V/50Hz	2600W	40M <sup>3</sup> /H	20M	21.8kg	63/60mm	0.7m
HLX-055	220V/50Hz	370W	10.8M <sup>3</sup> /H	8.5M	6.6kg	38mm	1.5m
HLX-090	220V/50Hz	900W	16.5M <sup>3</sup> /H	10M	8.0kg	50/48.5mm	1.5m
HLX-250	220V/50Hz	250W	9.0M <sup>3</sup> /H	6M	4.7kg	50/48.5mm	1.5m